

LED ECO-FLOOD SERIE

LED ECO-FLOOD SERIES




**TOEPASSINGSGEBIEDEN: VERLICHTING VAN
BILLBOARDS, RECLAMEBORDEN, GEVELS,
OBJECTEN, ETC.**

**APPLICATIONS: ILLUMINATION OF BILLBOARDS,
ADVERTISING SIGNS, FACADES, OBJECTS, ETC.**

De LED Eco-Flood is dé economische keuze qua compacte schijnwerper. Het compacte design heeft geresulteerd in een eenvoudig toepasbaar en tijdloos armatuur. Door de grote verlichtingshoek is deze schijnwerper uitermate geschikt voor het vanaf korte afstand verlichten van objecten in vele situaties.

The LED Eco-Flood is the best economic choice for a compact floodlight. The result of the compact design is an easily applicable and timeless fixture. Due its large beam angle, this floodlight is particularly suitable for illuminating objects from a short distance in many situations.

LED ECO-FLOOD SERIE (LED ECO-FLOOD SERIES)

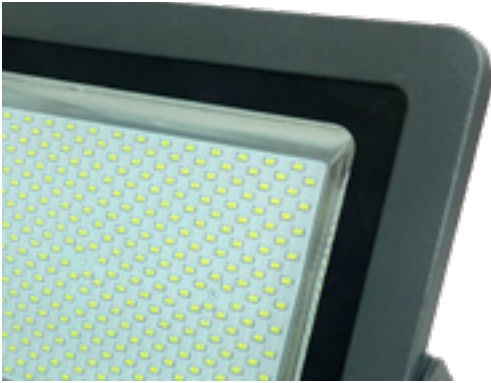

KENMERKEN (FEATURES)

- LED schijnwerper
- Tot 120 Lm/W
- Zeer slim en compact design
- Aluminium behuizing met gehard glazen afscherming
- Vijf verschillende uitvoeringen in vermogen oplopend van 10 tot 200W
- Waterdicht (IP65)
- Elektrische veiligheidsklasse: Klasse I
- LED floodlight
- Up to 120 Lm/W
- Highly intelligent and compact design
- Aluminium housing with hardened glass shielding
- Five different versions with power consumption from 10 to 200W
- Waterproof (IP65)
- Electrical safety class: Class I

CE IP65   3 JAAR GARANTIE
YEARS WARRANTY

TECHNISCHE SPECIFICATIES (TECHNICAL SPECIFICATIONS)

Productfoto Product photo	Vermogen Power consumption (W)	Kleurtemp. Color temperature	Lichtstroom Light output (LM)	Art. nr. Art. no.	Prijs Price
	10W	3000K	1100Lm	41060900	€ 27
		4200K	1200Lm	41060901	€ 27
		6500K	1200Lm	41060902	€ 27
	30W	3000K	3250Lm	41060920	€ 53
		4200K	3600Lm	41060921	€ 53
		6500K	3600Lm	41060922	€ 53
	50W	3000K	5400Lm	41060930	€ 64
		4200K	6000Lm	41060931	€ 64
		6500K	6000Lm	41060932	€ 64
	100W	3000K	11000Lm	41060950	€ 159
		4200K	12000Lm	41060951	€ 159
		6500K	12000Lm	41060952	€ 159
	200W	3000K	21600Lm	41060970	€ 274
		4200K	24000Lm	41060971	€ 274
		6500K	24000Lm	41060972	€ 274

Lichtbron (Light source): SMD LED
 Verlichtingshoek (Beam angle): 100°
 Kleurweergave (Color rendering): Ra >70
 Bedrijfstemperatuur (Operating temperature): -25°C - +50°C
 Aantal branduren (Rated life hours): > 30.000 h
 LED voeding (inclusief) (LED driver (included)): CE
 Voedingsspanning (Input): 100 - 240V AC 50-60Hz
 Cosinus phi (Cos phi): > 0.95
 Veiligheidsklasse (Safety class): Klasse I (Class I)
 Kabellengte (Cable length): 1.5m

MAATTEKENINGEN (DIMENSIONAL DRAWINGS)

